



International Journal of HRM and Organizational Behavior



www.ijhromob.com

editor@ijhromob.com

FINDING NOVELTY IN ONLINE TRAVEL REVIEWS USING DEEP LEARNING

T ANIL KUMAR¹, J VINODH², TATIREDDY RAVI³, M RANJITHIKUMAR REDDY⁴

¹Associate Professor, Department of MCA, Sri Venkatesa Perumal College of Engineering & Technology, Puttur,
Email: anil.thumburu@gmail.com

²P.G Scholar, Department of MCA, Sri Venkatesa Perumal College of Engineering & Technology, Puttur, Email:
vinkecha99@gmail.com

³Assistant Professor, Department of CSE, Sri Venkatesa Perumal College of Engineering & Technology, Puttur,
Email: tatireddyravi.ai@gmail.com

⁴Assistant Professor, Department of CSE, Sri Venkatesa Perumal College of Engineering & Technology, Puttur,
Email: ranjithk.reddy85@gmail.com

Abstract: The exploration intends to make a classification structure and DL model, BERT-BiGRU, that can automatically detect novelty seeking (NS) from online travel reviews. These assessments are enormous and unstructured, making manual arrangement troublesome. Programmed approaches to productively deal with and assess the gigantic material are required because of this limitation. The proposed DL model, BERT-BiGRU, based on Bidirectional Encoder Representations from Transformers, has accomplished great accuracy and F1 scores while identifying the NS character quality from surveys. This shows the model's viability. The analysis demonstrates the way that strong computational strategies can consequently recognize character attributes, for example, curiosity chasing, from trip assessments. Mechanization is more proficient and versatile than human methodologies. The undertaking's discoveries give a total NS character trademark classification framework. This worldview might be utilized in the travel industry advertising and proposal frameworks to grasp client inclinations. The drive propels brain science and showcasing computational strategies. The utilization of DL models like BERT-BiGRU to distinguish character attributes from unstructured text information advances

progressed approaches in numerous disciplines, showing their commitment past customary applications. Project developments incorporate a hybrid model called "BERT CNN-BI-GRU" and "BERT-LSTM-GRU" with close to 100% accuracy.[66]

Index terms - Tourism industry, BERT- BiGRU, novelty seeking, online travel reviews.

1. INTRODUCTION

The web has crawled into numerous parts of our daily existence as data innovation has progressed. The travel industry has logically moved on the web. Since online travel networks have arisen, more guests are scanning the web for area presentations and traveler reviews prior to booking [1].

Most internet based the travel industry stage reviews mirror explorers' insights. Assume this information is gathered and assessed to show voyagers' good and gloomy sentiments about the travel industry administrations. Assuming this is the case, it will help explorers comprehend the close to home tendencies of harbingers toward a traveler site and help their decision-production [2]. To work on their assets and

forestall deficiencies, visit administrators can concentrate on clients' commendation and analysis. Supervisors use surveys to change products and projects and gain an upper hand [3].

Character qualities are mental designs that impact conduct and cause individuals to respond much the same way to changed circumstances [4]. Specialists generally accumulate character information utilizing self-announcing measures, which ask respondents to self-assess. Most character trademark estimating instruments are normalized and depend on respondents' abstract sentiments and self-proclamation [6]. Overview respondents will generally communicate their thoughts all the more socially and self-representatively. All in all, people could deliberately give deceiving answers, which brings down estimation accuracy [7].

Online conduct information may consequently recognize and evaluate character qualities, dissimilar to mental testing [8]. The abstract and static part of customary character quality estimating approaches is survived. It additionally stays away from self-revealing predisposition and offers better approaches to show guests character characteristics.[68]

A character quality called novelty seeking (NS) [9] includes a requirement for assortment, interest, intricacy, and strong feelings and encounters. NS drives delight travel and is an inherent characteristic [10], [11]. It is critical to objective determination and one of the greatest factors affecting voyagers [12]. NS impacts sightseers' return goal [13], objective reliability [14], and fulfillment [15]. NS is a character highlight that impacts the travel industry inspiration and is indispensable to the travel industry promoting strategies. New vacationer areas can be proposed in

view of NS shoppers' inclinations since they like to make a trip to remote and startling districts. Associations might improve recommender frameworks and make client centered promoting drives. It might help traveler fulfillment, dispense with overt repetitiveness, and broaden ideas.

2. LITERATURE SURVEY

Past investigations has shown that social loafing as a principal obstruction frustrates online local area development. Nonetheless, basic exploration on friendly loafing in online travel gatherings are as yet deficient. In view of self-assurance and social character hypothesis, this paper fundamentally looks at how natural inspiration (pleasure in aiding and gluttonous inspiration), outward inspiration (notoriety and correspondence), and local area ID influence social loafing in web-based travel networks utilizing information from 300 Chinese respondents [1]. After a primary condition displaying examination, this investigation discovered that main happiness in aiding adversely influences social loafing, while local area distinguishing proof in a roundabout way restrains the other three sorts of inspiration. Local area ID decreases social loafing and is all the more decidedly affected by outward motivator (notoriety and correspondence). For additional review, hypothetical and commonsense proposition are made.

In light of self-assurance hypothesis, we propose and test an integrative worldview to make sense of what client incivility means for staff administration execution [5]. We utilized multisource information from two waves in a shopping center to find that the strength of the interceded connection between client incivility and worker administration execution (through natural inspiration) differed in view of

representative center self assessments. Representatives with high center self assessments had a more fragile negative backhanded impact of client incivility on help execution.

This paper inspects paranoid idea brain science studies [4, 5, 6, 7, 8]. This meta-investigation utilizes irregular impacts models to inspect the connection between Huge Five character attributes and paranoid ideas. The efficient survey found 96 investigations [6]. Indicators, suggestions, operationalization, overviews, and significant fear inspired notions are covered. We recovered 74 impact sizes from 13 papers for meta-investigation. The mental writing on scheme conviction indicators is parted into obsessive (suspicion) and socio-political (felt vulnerability) approaches. In this early field, hypothetical systems are not many. In the wake of amassing impact sizes, meta-examination tracked down no critical relationship between connivance convictions and suitability, receptiveness to encounter, or the Large Five character qualities. Plans and operationalization fluctuate generally nearby. [36] This article surveys contraption, concentrate on philosophies, and existing data to advance paranoid notion exploration and agreement.

Character attributes influence human conduct in various settings and are vital for some hypothetical and functional fields [5, 6]. In this viewpoint, we make sense of character estimation thinking and assess primary character scientific classifications. We present a few thoughts for scholastics and professionals on when and how to use character estimation. [7] Various leveled portrayals and five-and six-factor models like the Huge Five and HEXACO are our fundamental accentuation. We assess every strategy's upsides and downsides. Results The paper makes sense of why the

Huge Five model rules and accepts it is major areas of strength for a system for grasping character. We suggest scholastics and specialists utilize the HEXACO and other ordered character models. We show instances of when substitute structures are superior to the Huge Five and make rules for picking estimations and executing character viewpoints examinations. End While the Enormous Five is an incredible in general character structure for some situations, specialists and experts ought to know about and utilize substitute estimations [8].

This study inspects how guest curiosity looking for moderates area picture, fulfillment, and short-and long haul bring goals back. A hypothetically developed primary course model was assessed utilizing 2009 review information from 450 European Mediterranean sightseers [11]. Bunch and discriminant investigation distinguished three oddity looking for guest gatherings: high, medium, and low. Multigroup invariance concentrate on investigated curiosity looking for's directing consequences for the underlying way model. Vacationer curiosity looking for moderates location picture, satisfaction, and return to goals. For high curiosity searchers, objective picture impacts traveler joy and momentary return expectations [46, 47, 48, 49, 50]. Consequently, objective chiefs should dissect market fragment curiosity looking to decide return to goals.

3. METHODOLOGY

i) Proposed Work:

The review gives an improved strategy to automatically recognizing novelty seeking (NS) from web travel assessments. It utilizes an classification framework and the BERT-BiGRU DL model [24] to productively assess unstructured text input. The

accuracy, speed, and adaptability of this framework improve it than human order. The undertaking incorporates hybrid models "BERT CNN-BI-GRU" and "BERT-LSTM-GRU," which accomplishes almost 100% accuracy for novelty detection [24, 27, 31]. These hybrid models use BERT and neural network structures to catch complex online travel review patterns. A simple to-utilize Flask system with SQLite joining works on client testing, enlistment, and signin. This module upgrades novelty detection, openness, and client commitment in DL applications.

ii) System Architecture:

The plan of the framework incorporates an exhaustive technique for automatically identifying novelty-seeking looking for qualities in online travel assessments. The technique begins with social occasion and disinfecting an assortment of text information, then marks the information as indicated by foreordained character credits. A BERT-BiGRU DL model is coordinated into the engineering's center, using successive conditions and bidirectional context oriented information. Marked information is utilized to prepare the model, and complex examples are caught by the BiGRU layer [24, 26, 27, 28, 31]. The result probabilities for each character feature are given by the Softmax layer. Eventually, marked text demonstrating expected characteristics is remembered for the result, and assessment estimates ensure the viability of the model. The making of bits of knowledge and their reconciliation into applications for the vacationer business are made simpler by this start to finish arrangement.[70]

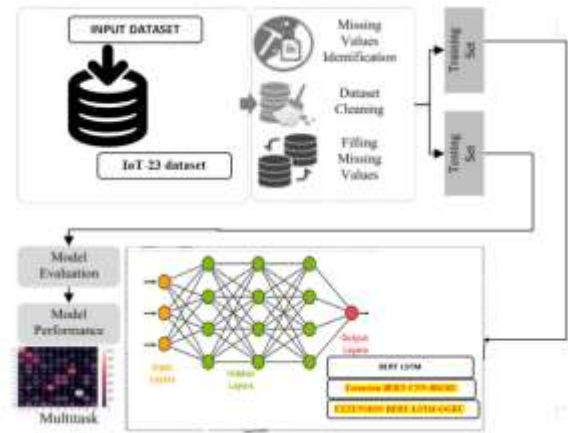


Fig 1 Proposed architecture

iii) Dataset collection:

We killed adverts and copy reviews to bring down the clamor in the trial information; this left us with a last exploratory dataset of 28959 surveys. Preprocessing the information is regularly vital in the wake of social affair the data required for the examination. TripAdvisor's powerful review system has altogether diminished the probability of commotion in the information and advertising. Stop words are terms that are frequently utilized at this point have no importance with regards to cleaning English text. Lessening the element of feature selection qualities is planned to limit framework calculations and upgrade the viability of investigation results. Articles, relational words, numerals, additions, and so forth are instances of stop words. Normal stop words in English are, for example, "a \ an," "the," "of \ off, etc. In reasonable applications, it is sporadically conceivable to reject specific certified terms that are helpful yet don't altogether influence the examination's decisions. Changing lowercase to uppercase is essential.

	content	label	type
0	Wow what an amazing walk on the Great Wall of ...	0	train
1	I came to spend 2 hours between 2 professional...	0	train
2	A MUST visit in one's life. History and Art fr...	1	train
3	It's was very peaceful and beautiful, go with ...	0	train
4	It is beautiful lake in all seasons. Beautiful...	0	train
...
3995	I visited it right when the official change to...	0	valid
3996	Suomenlinna is stunning historic place. We wen...	1	valid
3997	Mitcha/Mika was funny, really knowledgeable art...	1	valid
3998	From the Helsinki market place there is a ferr...	1	valid
3999	Even though there were people there at sunrise...	1	valid

4000 rows x 3 columns

Fig 2 REVIEWS dataset

iv) Data Processing:

Data processing transforms raw information into business-helpful data. Information researchers accumulate, sort out, clean, check, break down, and orchestrate information into diagrams or papers. Data can be handled physically, precisely, or electronically. Data ought to be more significant and decision-production simpler. Organizations might upgrade activities and settle on basic decisions quicker. PC programming improvement and other mechanized information handling innovations add to this. Big data can be transformed into significant bits of knowledge for quality administration and independent direction.

v) Feature selection:

Feature selection chooses the most steady, non-repetitive, and pertinent elements for model turn of events. As data sets extend in amount and assortment, purposefully bringing down their size is significant. The fundamental reason for feature selection is to increment prescient model execution and limit processing cost.

One of the vital pieces of feature engineering is picking the main attributes for machine learning algorithms. To diminish input factors, feature selection

methodologies take out copy or superfluous elements and limit the assortment to those generally critical to the ML model. Rather than permitting the ML model pick the main qualities, feature selection ahead of time enjoys a few benefits.

vi) Algorithms:

Long Short-Term Memory (LSTM) is a recurrent neural network that catches consecutive information's drawn out conditions. A memory cell that stores information for long terms is presented. The information, neglect, and result entryways of the LSTM administer data stream into, out of, and inside the cell state. These entryways figure out what to recall and what to neglect, making the model helpful in natural language processing and different assignments that need long haul reliance.

```

LSTM

When train existing RNN-LSTM algorithm
lstm = Sequential() #defining deep learning sequential object
#adding one layer with 32 filters to filter given input & train data to select relevant features
lstm.add(LSTM(32, input_shape=(X_train.shape[1], X_train.shape[2]), return_sequences=True))
#adding dropout layer to remove irrelevant features
lstm.add(Dropout(0.5))
#adding another layer
lstm.add(LSTM(32))
lstm.add(Dropout(0.5))
#defining output layer for prediction
lstm.add(Dense(X_train.shape[1], activation='softmax'))
#compile RNN model
lstm.compile(optimizer='adam', loss='categorical_crossentropy', metrics=['accuracy'])
#start training model on train data and perform validation on test data
#fit on both datasets ('model', 'lstm_weights.npy') -> keras
model_checkpoint = ModelCheckpoint(filepath='model/lstm_weights.npy', verbose=1, save_best_only=True)
fit = lstm.fit(X_train, y_train, batch_size=32, epochs=10, validation_data=(X_test, y_test), callbacks=[model_checkpoint])
# if you want to save history, you can
history = lstm.history
# if you want
# save
fit.save('lstm_model', 'model/lstm_weights.npy')
    
```

Fig 3 LSTM

Bidirectional Gated Recurrent Unit (BiGRU) [27, 33, 34] is a recurrent neural network that cycles input information forward and in reverse, working on Gated Recurrent Units (GRUs). The GRU's update and reset entryways manage data stream in the secret state. BiGRU processes input successions bidirectionally to catch past and future relationship. This bidirectional strategy empowers the model handle the info grouping setting and catch key examples and attributes.[72]

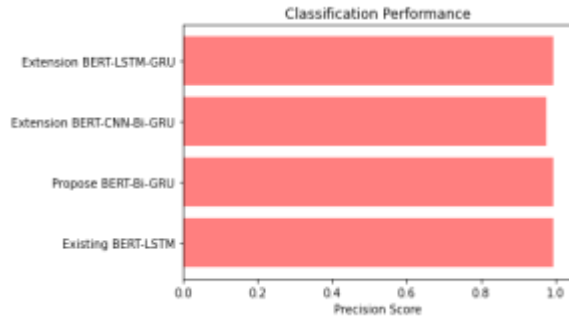


Fig 6 Precision comparison graph

Recall: Machine learning recall assesses a model's ability to perceive all significant examples of a class. It shows a model's culmination in catching occasions of a class by contrasting accurately anticipated positive perceptions with complete positives.

$$Recall = \frac{TP}{TP + FN}$$

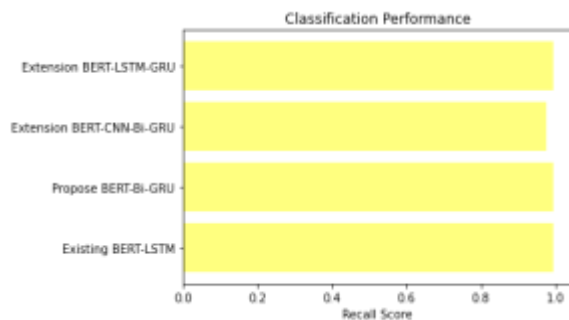


Fig 7 Recall comparison graph

Accuracy: The level of accurate predictions spread the word about in a classification work is as accuracy, and it demonstrates how accurate a model's forecasts are generally speaking.

$$Accuracy = \frac{TP + TN}{TP + FP + TN + FN}$$

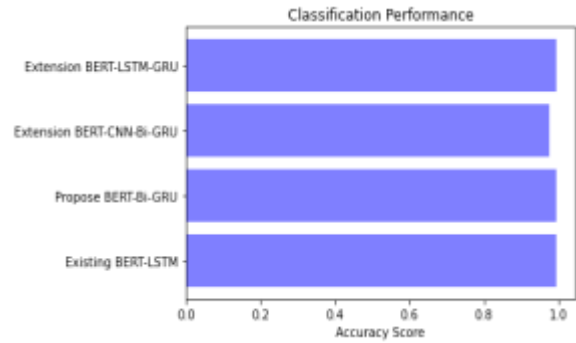


Fig 8 Accuracy graph

F1 Score: The F1 Score is suitable for unequal datasets in light of the fact that it gives a fair metric that considers both misleading up-sides and bogus negatives. It is determined as the symphonious mean of accuracy and recall.

$$F1\ Score = 2 * \frac{Recall \times Precision}{Recall + Precision} * 100$$

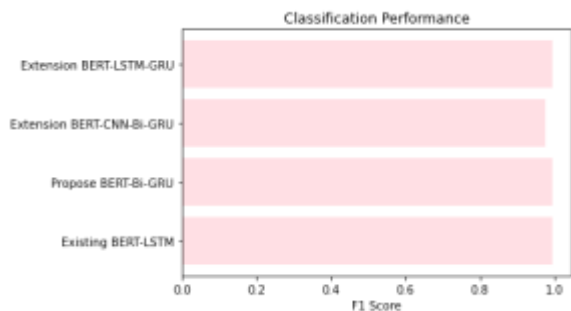


Fig 9 F1Score

ML Model	Accuracy	Precision	Recall	f1_score
Existing BERT-LSTM Model	0.994	0.994	0.994	0.994
Propose BERT-Bi-GRU Model	0.995	0.995	0.995	0.995
Extension BERT-CNN-Bi-GRU Model	0.975	0.975	0.975	0.975
Extension BERT-LSTM-GRU Model	0.994	0.994	0.994	0.994

Fig 10 Performance Evaluation



Fig 11 Home page

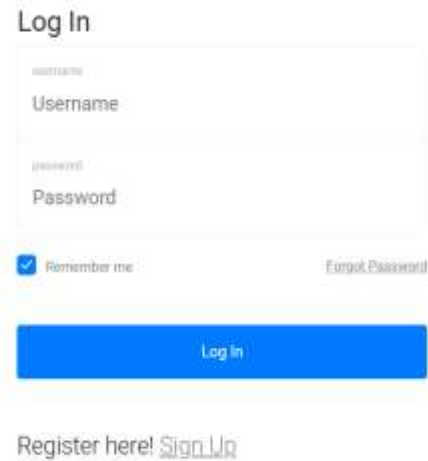


Fig 13 Login page

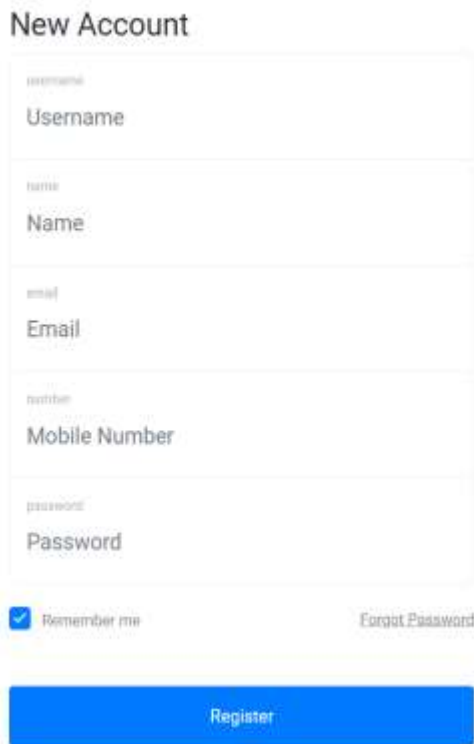


Fig 12 Signin page



Fig 14 User input



Fig 15 Predict result for given input

5. CONCLUSION

Utilizing different deep learning calculations to anticipate Novelty Seeking (NS) credits from online travel reviews further developed accuracy. NS highlights assist with grasping travelers' inclinations and propensities. The venture utilized LSTM, BiGRU [26], and hybrid models like LSTM+GRU to take utilization of every calculation's capacities to more readily investigate printed input. This blend probably assisted the calculation with recognizing shifted examples and nuances in reviews, further developing NS characteristic forecasts. Voyagers and travel firms benefit from robotized NS conduct discovery in movement audits. This study can assist travelers with picking new spots. It assists clients with distinguishing spots or exercises that suit their requirement for unmistakable excursion encounters. Understanding NS propensities helps travel organizations assemble new items, sell them, and anticipate request. They might customize their administrations and merchandise to novelty-seeking tourists utilizing this information. The hybrid model utilizing DL approaches showed guarantee for additional examination. This shows that mixing DL structures and ensemble approaches could increment text based information standard of conduct investigation accuracy and productivity [20, 24]. It considers novel calculation blends, gathering system refinements, and application outside travel reviews. DL for appreciating complex ways of behaving from printed information across spaces will progress with this undertaking's a positive outcome.

6. FUTURE SCOPE

The novelty-seeking (NS) character trademark will be utilized to enhance the travel industry objective recommendation system. This improvement might include making NS client gatherings, further developing client picture information, and utilizing accuracy showcasing. The innovation might give really intriguing outing ideas by adjusting them to client characters. Deep learning approaches like the BERT-BiGRU model [33] and reviews and meetings can be concentrated together. This hybrid technique can analyze NS more effectively and accurately than emotional and static character testing draws near. A more complete character profile might be gotten by joining information. The DL approach might be utilized to surmise character characteristics from text input past online travel reviews [20, 24]. Counting item reviews, staff criticism, and moral occasion examination. Growing the model's application shows its flexibility and potential to give bits of knowledge past the travel industry. The venture's discoveries might move DL, character quality recognition, and novelty seeking text arrangement studies. Grasping client conduct, inclinations, and intentions can profit from computational brain research and advertising systems. This can prompt further developed and successful frameworks in various areas.[74]

REFERENCES

- [1] Y. Chang, R.-J. Hou, K. Wang, A. P. Cui, and C.-B. Zhang, "Effects of intrinsic and extrinsic motivation on social loafing in online travel communities," *Comput. Hum. Behav.*, vol. 109, Aug. 2020, Art. no. 106360.
- [2] G. Assaker, "Age and gender differences in online travel reviews and user-generated-content (UGC) adoption: Extending the technology acceptance model

- (TAM) with credibility theory,” *J. Hospitality Marketing Manag.*, vol. 29, no. 4, pp. 428–449, May 2020, doi: 10.1080/19368623.2019.1653807.
- [3] M. J. Garcia, J. R. Chico, A. R. P. Sanchez, and J. A. L. Sanchez, “Does electronic word-of-mouth differently influence traditional economy vs. collaborative economy tourist accommodation? An empirical study,” *J. Quality Assurance Hospitality Tourism*, vol. 23, no. 3, pp. 771–795, 2021, doi: 10.1080/1528008X.2021.1913692.
- [4] I. Sagovnovic and S. Kovacic, “Predicting travel motivation with personality and personal values—The roles of big five plus honesty/humility personality traits and Kahle’s values,” *Int. J. Hospitality Tourism Admin.*, pp. 1–30, Jan. 2022.
- [5] D. J. Yoon, “Rude customers and service performance: Roles of motivation and personality,” *Service Industries J.*, vol. 42, nos. 1–2, pp. 81–106, Jan. 2022.
- [6] A. Goreis and M. Voracek, “A systematic review and meta-analysis of psychological research on conspiracy beliefs: Field characteristics, measurement instruments, and associations with personality traits,” *Frontiers Psychol.*, vol. 10, p. 205, Feb. 2019.
- [7] J. Anglim and P. O’connor, “Measurement and research using the big five, HEXACO, and narrow traits: A primer for researchers and practitioners,” *Austral. J. Psychol.*, vol. 71, no. 1, pp. 16–25, Mar. 2019.
- [8] Y. Mehta, N. Majumder, A. Gelbukh, and E. Cambria, “Recent trends in deep learning based personality detection,” *Artif. Intell. Rev.*, vol. 53, no. 4, pp. 2313–2339, Apr. 2020.
- [9] E. C. Hirschman, “Innovativeness, novelty seeking, and consumer creativity,” *J. Consum. Res.*, vol. 7, no. 3, pp. 283–295, 1980.
- [10] S. S. Jang and R. Feng, “Temporal destination revisit intention: The effects of novelty seeking and satisfaction,” *Tourism Manag.*, vol. 28, no. 2, pp. 580–590, Apr. 2007.
- [11] G. Assaker and R. Hallak, “Moderating effects of tourists novelty-seeking tendencies on destination image, visitor satisfaction, and short- and longterm revisit intentions,” *J. Travel Res.*, vol. 52, no. 5, pp. 600–613, Sep. 2013.
- [12] A. Lloyd, R. McKay, C. L. Sebastian, and J. H. Balsters, “Are adolescents more optimal decision-makers in novel environments? Examining the benefits of heightened exploration in a patch foraging paradigm,” *Develop. Sci.*, vol. 24, no. 4, p. e13075, 2021.
- [13] E. E. Pujiastuti, “Novelty seeking to predict behavior intention in rural destination,” *Jurnal Bisnis Dan Manajemen*, vol. 7, no. 2, pp. 1–13, Nov. 2020.
- [14] W.-J. Seo, L. A. Lewin, B. Moon, and B.-Y. Moon, “Moderating effects of affective image on relationship between novelty-seeking and behavioural intentions of runners,” *South Afr. J. Res. Sport, Phys. Educ. Recreation*, vol. 40, no. 3, pp. 105–120, 2018.
- [15] Q. N. Nguyen, H. L. Nguyen, and T. D. H. Le, “Relationships among novelty seeking, satisfaction, return intention, and willingness to recommend of foreign tourists in Vietnam,” *Manag. Sci. Lett.*, vol. 10, no. 10, pp. 2249–2258, 2020.
- [16] L.-H. Lee, Y. Lu, P.-H. Chen, P.-L. Lee, and K.-K. Shyu, “NCUEE at MEDIQA 2019: Medical text

inference using ensemble BERT-BiLSTMattention model,” in Proc. 18th BioNLP Workshop Shared Task, 2019, pp. 528–532.

[17] K. Kowsari, K. J. Meimandi, M. Heidarysafa, S. Mendu, L. Barnes, and D. Brown, “Text classification algorithms: A survey,” *Information*, vol. 10, no. 4, p. 150, Apr. 2019.

[18] A. Rantanen, J. Salminen, F. Ginter, and B. J. Jansen, “Classifying online corporate reputation with machine learning: A study in the banking domain,” *Internet Res.*, vol. 30, no. 1, pp. 45–66, Nov. 2019, doi: 10.1108/intr-07-2018-0318.

[19] S. Li, M. You, D. Li, and J. Liu, “Identifying coal mine safety production risk factors by employing text mining and Bayesian network techniques,” *Process Saf. Environ. Protection*, vol. 162, pp. 1067–1081, Jun. 2022.

[20] C. Zhang, T. Tong, and Y. Bu, “Examining differences among book reviews from various online platforms,” *Online Inf. Rev.*, vol. 43, no. 7, pp. 1169–1187, 2019.

[21] K. Zvarevashe and O. O. Olugbara, “A framework for sentiment analysis with opinion mining of hotel reviews,” in Proc. Conf. Inf. Commun. Technol. Soc. (ICTAS), Mar. 2018, pp. 1–4.

[22] Y. Xie and F. Xiang, “An improved approach based on dynamic mixed sampling and transfer learning for topic recognition: A case study on online patient reviews,” *Online Inf. Rev.*, vol. 46, no. 6, pp. 1017–1033, Sep. 2022

[23] S. Ilyas, A. A. Shah, and A. Sohail, “Order management system for time and quantity saving of recipes ingredients using GPS tracking systems,”

IEEE Access, vol. 9, pp. 100490–100497, 2021, doi: 10.1109/ACCESS.2021.3090808.

[24] C.-X. Wan and B. Li, “Financial causal sentence recognition based on BERT-CNN text classification,” *J. Supercomput.*, vol. 78, no. 5, pp. 6503–6527, Apr. 2022, doi: 10.1007/s11227-021-04097-5.

[25] J. Chen, Y. Zhang, J. Wu, W. Cheng, and Q. Zhu, “SOC estimation for lithium-ion battery using the LSTM-RNN with extended input and constrained output,” *Energy*, vol. 262, Jan. 2023, Art. no. 125375.

[26] C. Xu, F. Yuan, and S. Chen, “BJBN: BERT-JOIN-BiLSTM networks for medical auxiliary diagnostic,” *J. Healthcare Eng.*, vol. 2022, pp. 1–7, Jan. 2022, doi: 10.1155/2022/3496810.

[27] B. Gupta, P. Prakasam, and T. Velmurugan, “Integrated BERT embeddings, BiLSTM-BiGRU and 1-D CNN model for binary sentiment classification analysis of movie reviews,” *Multimedia Tools Appl.*, vol. 81, no. 23, pp. 33067–33086, 2022.

[28] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, “BERT: Pre-training of deep bidirectional transformers for language understanding,” 2018, arXiv:1810.04805.

[29] K. Chatsiou, “Text classification of manifestos and COVID-19 press briefings using BERT and convolutional neural networks,” 2020, arXiv:2010.10267.

[30] W. H. Bangyal, R. Qasim, N. U. Rehman, Z. Ahmad, H. Dar, L. Rukhsar, Z. Aman, and J. Ahmad, “Detection of fake news text classification on COVID-19 using deep learning approaches,” *Comput. Math. Methods Med.*, vol. 2021, pp. 1–14, Nov. 2021.

- [31] P. K. Verma, P. Agrawal, V. Madaan, and R. Prodan, "MCred: Multi-modal message credibility for fake news detection using BERT and CNN," *J. Ambient Intell. Humanized Comput.*, pp. 1–13, Jul. 2022.
- [32] R. Cai, B. Qin, Y. Chen, L. Zhang, R. Yang, S. Chen, and W. Wang, "Sentiment analysis about investors and consumers in energy market based on BERT-BiLSTM," *IEEE Access*, vol. 8, pp. 171408–171415, 2020, doi: 10.1109/access.2020.3024750.
- [33] Q. Yu, Z. Wang, and K. Jiang, "Research on text classification based on BERT-BiGRU model," *J. Phys., Conf.*, vol. 1746, no. 1, Jan. 2021, Art. no. 012019, doi: 10.1088/1742-6596/1746/1/012019.
- [34] N.-N. Zhang and Y. Xing, "Questions and answers on legal texts based on BERT-BiGRU," *J. Phys., Conf.*, vol. 1828, no. 1, Feb. 2021, Art. no. 012035.
- [35] J. Dai and C. Chen, "Text classification system of academic papers based on hybrid BERT-BiGRU model," in *Proc. 12th Int. Conf. Intell. HumanMach. Syst. Cybern. (IHMSC)*, Aug. 2020, pp. 40–44.
- [36] J. D. Moreno, J. Á. Martínez-Huertas, R. Olmos, G. Jorge-Botana, and J. Botella, "Can personality traits be measured analyzing written language? A meta-analytic study on computational methods," *Personality Individual Differences*, vol. 177, Jul. 2021, Art. no. 110818.
- [37] J. Sun, H. A. Schwartz, Y. Son, M. L. Kern, and S. Vazire, "The language of well-being: Tracking fluctuations in emotion experience through everyday speech," *J. Personality Social Psychol.*, vol. 118, no. 2, p. 364, 2020.
- [38] T. Smartt, S. Talaifar, and S. D. Gosling, "Dostoyevsky's conjecture: Evaluating personality impressions based on laughter," *J. Nonverbal Behav.*, vol. 46, pp. 383–397, Aug. 2022.
- [39] M. E. Tabacchi, B. Caci, M. Cardaci, and V. Perticone, "Early usage of Pokémon go and its personality correlates," *Comput. Hum. Behav.*, vol. 72, pp. 163–169, Jul. 2017.
- [40] K. N. P. Kumar and M. L. Gavrilova, "Latent personality traits assessment from social network activity using contextual language embedding," *IEEE Trans. Computat. Social Syst.*, vol. 9, no. 2, pp. 638–649, Apr. 2021.
- [41] M. Romeo, D. H. García, T. Han, A. Cangelosi, and K. Jokinen, "Predicting apparent personality from body language: Benchmarking deep learning architectures for adaptive social human–robot interaction," *Adv. Robot.*, vol. 35, no. 19, pp. 1167–1179, Oct. 2021.
- [42] R. Subramanian, J. Wache, M. K. Abadi, R. L. Vieriu, S. Winkler, and N. Sebe, "ASCERTAIN: Emotion and personality recognition using commercial sensors," *IEEE Trans. Affect. Comput.*, vol. 9, no. 2, pp. 147–160, Apr./Jun. 2018.
- [43] X. Xue, J. Feng, and X. Sun, "Semantic-enhanced sequential modeling for personality trait recognition from texts," *Int. J. Speech Technol.*, vol. 51, no. 11, pp. 7705–7717, Nov. 2021.
- [44] D. Pizzolli and C. Strapparava, "Personality traits recognition in literary texts," in *Proc. 2nd Workshop Storytelling*, 2019, pp. 107–111.
- [45] L. Qiu, J. Lu, J. Ramsay, S. Yang, W. Qu, and T. Zhu, "Personality expression in Chinese language

use,” *Int. J. Psychol.*, vol. 52, no. 6, pp. 463–472, Dec. 2017.

[46] T.-H. Lee and J. Crompton, “Measuring novelty seeking in tourism,” *Ann. Tourism Res.*, vol. 19, no. 4, pp. 732–751, Jan. 1992.

[47] R. P. Agustina and Y. Artanti, “The role of satisfaction as a mediating variable on the effects of novelty seeking and familiarity on tourist revisit intention,” *Diponegoro Int. J. Bus.*, vol. 3, no. 2, pp. 88–96, Dec. 2020.

[48] S. Zulzilah, E. Prihantoro, and C. Wulandari, “The influence of destination image, novelty seeking, and information quality in social media: The case of media news company Indonesian tourism on Instagram,” *Asian J. Media Commun. (AJMC)*, vol. 3, no. 1, pp. 23–32, 2019.

[49] M. L. Azic and N. Sustar, “Loyalty to holiday style: Motivational determinants,” *Tourism Rev.*, vol. 77, no. 1, pp. 239–255, 2021.

[50] P. H. Pearson, “Relationships between global and specified measures of novelty seeking,” *J. Consulting Clin. Psychol.*, vol. 34, no. 2, pp. 199–204, Apr. 1970.

[51] M. Ludwig, M. Richter, J. Goltermann, R. Redlich, J. Repple, C. Flint, D. Grotegerd, K. Koch, E. J. Leehr, S. Meinert, C. Hulsmann, V. Enneking, H. Kugel, T. Hahn, B. T. Baune, U. Dannlowski, and N. Opel, “Novelty seeking is associated with increased body weight and orbitofrontal grey matter volume reduction,” *Psychoneuroendocrinology*, vol. 126, Apr. 2021, Art. no. 105148.

[52] F.-Z. Zhuang, Y. M. Zhou, H. C. Ying, F. Z. Zhang, X. Ao, X. Xie, Q. He, and H. Xiong, “Sequential recommendation via cross-domain

novelty seeking trait mining,” *J. Comput. Sci. Technol.*, vol. 35, pp. 305–319, Mar. 2020.

[53] S. Kitouna and Y.-G. Kim, “Tourists novelty-seeking motivation in naturebased tourism destinations: The case of Vang Vieng city in Laos,” *Int. J. Tourism Hospitality Res.*, vol. 31, no. 10, pp. 45–58, Oct. 2017.

[54] G. Sheppard, K.-L. Williams, B. Metcalfe, M. Clark, M. Bromley, P. Pageau, M. Woo, Y. Yi, A. J. Devasahayam, and A. Dubrowski, “Using Kane’s framework to build an assessment tool for undergraduate medical student’s clinical competency with point of care ultrasound,” *BMC Med. Educ.*, vol. 23, no. 1, pp. 1–8, Jan. 2023.

[55] J. Wen, E. Thibeau-Sutre, M. Diaz-Melo, J. Samper-González, A. Routier, S. Bottani, D. Dormont, S. Durrleman, N. Burgos, and O. Colliot, “Convolutional neural networks for classification of Alzheimer’s disease: Overview and reproducible evaluation,” *Med. Image Anal.*, vol. 63, Jul. 2020, Art. no. 101694.

[56] D. Valero-Carreras, J. Alcaraz, and M. Landete, “Comparing two SVM models through different metrics based on the confusion matrix,” *Comput. Oper. Res.*, vol. 152, Apr. 2023, Art. no. 106131.

[57] A. A. Shah, M. K. Ehsan, A. Sohail, and S. Ilyas, “Analysis of machine learning techniques for identification of post translation modification in protein sequencing: A review,” in *Proc. Int. Conf. Innov. Comput. (ICIC)*, Nov. 2021, pp. 1–6, doi: 10.1109/ICIC53490.2021.9693020.

[58] A. Sohail, N. A. Nawaz, A. A. Shah, S. Rasheed, S. Ilyas, and M. K. Ehsan, “A systematic literature

review on machine learning and deep learning methods for semantic segmentation,” *IEEE Access*, vol. 10, pp. 134557–134570, 2022, doi: 10.1109/ACCESS.2022.3230983.

[59] D. Zheng, G. Pang, B. Liu, L. Chen, and J. Yang, “Learning transferable deep convolutional neural networks for the classification of bacterial virulence factors,” *Bioinformatics*, vol. 36, no. 12, pp. 3693–3702, Jun. 2020, doi: 10.1093/bioinformatics/btaa230.

[60] B. Kandimalla, S. Rohatgi, J. Wu, and C. L. Giles, “Large scale subject category classification of scholarly papers with deep attentive neural networks,” *Frontiers Res. Metrics Anal.*, vol. 5, Feb. 2021, Art. no. 600382.

[61] B. Jang, I. Kim, and J. W. Kim, “Word2vec convolutional neural networks for classification of news articles and tweets,” *PLoS ONE*, vol. 14, no. 8, Aug. 2019, Art. no. e0220976.

[62] A. S. Kale, V. Pandya, F. Di Troia, and M. Stamp, “Malware classification with Word2Vec, HMM2Vec, BERT, and ELMo,” *J. Comput. Virol. Hacking Techn.*, pp. 1–16, Apr. 2022.

[63] B.-T. Pham-Hong and S. Chokshi, “PGSG at SemEval-2020 task 12: BERT-LSTM with tweets pretrained model and noisy student training method,” in *Proc. 14th Workshop Semantic Eval.*, 2020, pp. 2111–2116.

[64] X. Deng, Q. Liu, Y. Deng, and S. Mahadevan, “An improved method to construct basic probability assignment based on the confusion matrix for classification problem,” *Inf. Sci.*, vol. 340, pp. 250–261, May 2016.

[65] G.Viswanath, “Hybrid encryption framework for securing big data storage in multi-cloud environment”, *Evolutionary intelligence*, vol.14, 2021, pp.691-698.

[66] Viswanath Gudditi, “Adaptive Light Weight Encryption Algorithm for Securing Multi-Cloud Storage”, *Turkish Journal of Computer and Mathematics Education (TURCOMAT)*, vol.12, 2021, pp.545-552.

[67] Viswanath Gudditi, “A Smart Recommendation System for Medicine using Intelligent NLP Techniques”, 2022 *International Conference on Automation, Computing and Renewable Systems (ICACRS)*, 2022, pp.1081-1084.

[68] G.Viswanath, “Enhancing power unbiased cooperative media access control protocol in manets”, *International Journal of Engineering Inventions*, 2014, vol.4, pp.8-12.

[69] Viswanath G, “A Hybrid Particle Swarm Optimization and C4.5 for Network Intrusion Detection and Prevention System”, 2024, *International Journal of Computing*, DOI: <https://doi.org/10.47839/ijc.23.1.3442>, vol.23, 2024, pp.109-115.

[70] G.Viswanath, “A Real Time online Food Ording application based DJANGO Restfull Framework”, *Juni Khyat*, vol.13, 2023, pp.154-162.

[71] Gudditi Viswanath, “Distributed Utility-Based Energy Efficient Cooperative Medium Access Control in MANETS”, 2014, *International Journal of Engineering Inventions*, vol.4, pp.08-12.

[72] G.Viswanath,“ A Real-Time Video Based Vehicle Classification, Detection And Counting

System”, 2023, Industrial Engineering Journal, vol.52, pp.474-480.

[73] G.Viswanath, “A Real- Time Case Scenario Based On Url Phishing Detection Through Login Urls ”, 2023, Material Science Technology, vol.22, pp.103-108.

[74] Manmohan Singh,Susheel Kumar Tiwari, G. Swapna, Kirti Verma, Vikas Prasad, Vinod Patidar, Dharmendra Sharma and Hemant Mewada, “A Drug-Target Interaction Prediction Based on Supervised Probabilistic Classification” published in Journal of Computer Science, Available at: <https://pdfs.semanticscholar.org/69ac/f07f2e756b79181e4f1e75f9e0f275a56b8e.pdf>